

# AXIOM™ Thermal Server Coffee Brewer

ITEM#	
PROJECT	

DATE



## **Model AXIOM-TS** with Thermal Server

(Thermal Server sold separately) Dimensions: 27.6" H x 9" W x 18.5" D (70.1 cm H x 22.9cm W x 47cm D)

# Features

## **AXIOM Thermal Server Coffee Brewer**

- Brews 4.5 to 7.5 gallons (15.7 to 28.4 litres) of perfect coffee per hour.
- Dual Voltage model Easily convertible by flipping a switch to:
  - 120 volt, 12.5 amp
  - 120/208 volt, 13 amp
  - 120/240 volt, 15 amp
- For high lime areas, BrewLOGIC™ technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD™ technology simplifies brewer programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Convenient airpots keep coffee hot and fresh for hours.
- Thermal Servers easily transported to meeting rooms, breakfast bars, etc.
- Brews directly into Thermal Servers with base.
- Ensures coffee brew quality with cold brew lock out capability.
- · Electronic diagnostics and built in tank drain make service easier.
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature control.
- · Hot water faucet.
- SplashGard® funnel deflects hot liquids away from the hand.
- Energy-saver mode reduces tank temperature during idle periods.

For current specification sheets and other information, go to www.bunn.com.

# Related Products

Easy Clear® EQ-17-TL

Product No.: 30200.1000

Dimensions:

 $12\frac{7}{16}$ " H x  $2\frac{1}{2}$ " W x 3" D 31.6 cm H x 6.35 cm W x 7.62 cm D



Easy Clear® ED-17-TL Product No.: 30201.1001

Dimensions:  $8\frac{1}{4}$ " H x  $2\frac{5}{16}$ " Dia. 20.95 cm H x 5.87 cm Dia.



## **Paper Filter Pack**

Product No.: 20115.6000 Packed per case: 1,000

Dimensions:


 $4\frac{1}{4}$ " Base x  $2\frac{3}{4}$ " Sidewall 10.8 cm Base x 6.98 cm Sidewall



## Thermal Server Booster\*

Product No.: 18010.6000 Capacity: 1 Thermal Server Shipping Weight: 2 lbs. (.9 kg)

Dimensions: 4.5" H x  $9\frac{1}{4}$ " W x  $8\frac{1}{4}$ " D 11.4 cm H x 23.5 cm W x 21 cm D





23300.6101 (Glass Liner) 23300.6120 (Stainless Liner) Capacity: 84 oz. (2.5 L)



without base. 23300.6124.	Product No. : 23300.6105 8

AXIOM-15-TS
AXIOM-35-TS
AXIOM-DV-TS

Model



#### CANADA **Dimensions & Specifications** Model Product # **Volts Tank Htr Total** Capacity Cubic Weight Cord Amps ft<sup>3</sup>/m<sup>3</sup> Watts Watts per hour lbs/kg **Attached** AXIOM-15 TS 38700.6050 120 12.3 1425 1475 4.5 gal/17.1 liter 5.2/.15 37 /16.8 Yes (Black Trunk, Plastic Funnel) 7.5 gal/20.8 liter 5.2/.15 37 /16.8 AXIOM-35 TS 38700.6054 120/240 14.6 3500 3500 No (Black Trunk, Stainless Steel Funnel) 120 12.3 1425 1475 4.5 gal/17.1 liter 5.2/.15 37 /16.8 AXIOM-DV TS 38700.6057 Yes (Black Trunk, Stainless Steel Funnel)

## Dual Volt Model can be wired in these optional wiring configurations:

120/208 13.0 2620 2670 6.5 gal/28.4 liter 120/240 15.0 3500 3550 7.5 gal/28.4 liter


Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: If wired for 120V, requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

If wired for 120/208V or 120/240V, requires 3-wires plus ground service rated 120/208V or 120/240V,

single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with  $\frac{1}{4}$  male flare fitting.

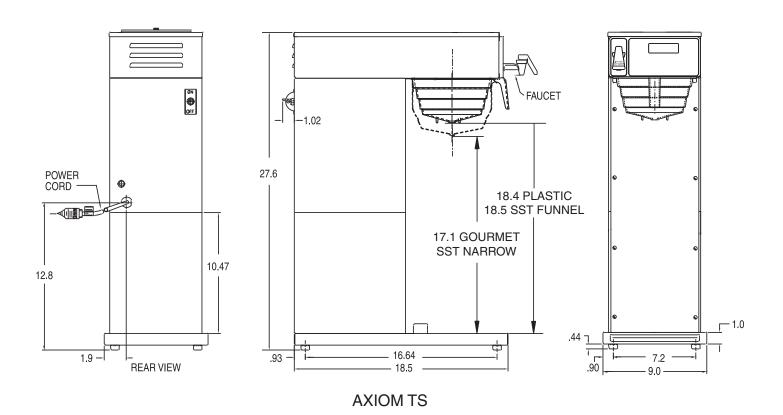

Bunn-O-Matic Corporation of Canada - 280 Industrial Pkwy. S. Aurora, Ontario L4G 3T9 • 905-841-2866 • Fax 905-841-2775 • www.bunn.com