



Best Compact Choice for the Al-Driven Future.













Introducing the ASUS NUC 15 Pro—where intelligent design meets unparalleled performance. Its compact form factor is engineered for versatility, making it ideal for a variety of development scenarios, from AI model training to data visualization. Powered by the latest Gen Intel® Core™ Ultra processors, DDR5 6400 MHz memory, and Intel® Arc GPU, it delivers exceptional speed and efficiency. Experience lightning-fast connectivity and seamless collaboration with cutting-edge Wi-Fi 7. Elevate your workflow and adapt to any environment with the NUC 15 Pro—your compact powerhouse for innovation.

Key Selling Points

Al-Optimized Power: Features the Latest Gen Intel® Core™ Ultra Series 2 CPU, Up to 99 Platform TOPS, optimized for a wide range of workloads delivering up to 18% gen/gen performance

Superior Connectivity: Features Intel® Wi-Fi 7 with up to 2.4X faster transfer rates, Wi-Fi Proximity Sensing, and certified Bluetooth® for enhanced audio quality and seamless connections.

Robust Security: Robust Security: With Intel® vPro™ on Arrow Lake architecture, offering faster threat detection and fTPM 2.0 for stronger data protection.

Integrated & Expandable: Compact 0.48L design with a tool-less 2.0 chassis for quick upgrades, offering 6X faster integration gen/gen.

Exceptional Display Potential: Connect to four 4K displays via HDMI 2.1 and Thunderbolt™ 4, with headless emulation. New sync power-off feature automatically shuts the screen for better energy efficiency

Reliable & Sustainable: Features 24/7 reliability with rigorous torture testing and MIL-STD-810H certification, ensuring durability in extreme conditions. The advanced cooling system enhances reliability by maintaining optimal performance, and eco-friendly packaging reflects a commitment to sustainability.

Audience:

- Small and Medium Business Enterprises
- Retail
- Education
- Collaboration
- · Remote Workers

Target Usages:

- Traditional and Smart Classrooms
- Communication File Sharing/ Virtual Meetings
- Daily Tasks/ Entertainment
- Digital Signage / Kiosk / POS









Mini-PC Specifications	Image A	Image B
------------------------	---------	---------

Marketing Name	Mini-PC Specific	eations	Image A	Image B
Montable Manage Manage Manage Manage Mass Manage Mass	Marketing Name	ASUS NUC 15 PRO Mini-PC (Tall)	ASUS NUC 1	5 PRO Mini-PC (slim)
ASUS Note	· ·			Image B
ASSINUTE Logs	ASUS Logo	·		-
Color	_			
CS Support	-			
CPU				
Graphics	СРИ	Intel® Core $^{\rm TM}$ Ultra 5 235H (vPro) Intel® Core $^{\rm TM}$ Ultra 7 255H Intel® Core $^{\rm TM}$ Ultra 5 225H Intel® Core $^{\rm TM}$ 7 240H Intel® Core $^{\rm TM}$ 5 210H	Intel® Core [™] Intel® Core [™] Intel® Co Intel® Co Intel® Intel®	M Ulta 7 265H (vPro) M Ultra 5 235H (vPro) Tel™ Ultra 7 255H Tel™ Ultra 7 255H Tel™ Ultra 5 225H Core™ 7 240H Core™ 5 210H
Memory 2 x SO-DIMM, Up to DDRS-5604, 3668°2 (Core 3, Core 5, Core 7) Intel® Craphics (Core3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDRS-5604, 3668°2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDRS-5604, 3668°2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDRS-5604, 3668°2 (Core Ultra) 2 x SO-DIMM, Up to DDRS-5604, 3668°2 (Core Ultra) 3 x K2242 PCIG Gen444, supports 12868°278 NVMe SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVMe SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVMe SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2280 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2242 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2242 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2242 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 2242 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 224 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 224 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 224 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 224 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 224 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 24 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 240 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 240 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 240 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 240 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 240 PCIG Gen444, supports 12868°278 NVME SSD 1 x M. 2 240 PCIG Gen444, supports 12868°278 NVME SSD 1	Chipset	Integrated	I	ntegrated
Memory 2 x SO-DIMM, Up to DDRS-5600, 48GR*2 (Core 3, Core 5, Core 7) 2 x SO-DIMM, Up to DDRS-5600, 48GR*2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDRS-5600, 48GR*2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDRS-5600, 48GR*2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDRS-5600, 48GR*2 (Core 3, Core 5, Core 7) 1 x M. 2 228D PCIE Gend*4, supports 128GR*2TB NVMe SSD 1 x M. 2 2242 PCIE Gend*4, supports 128GR*2TB NVMe SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2242 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1 x M. 2 2424 PCIE Genf*4, supports 128GR*2TB NVME SSD 1	Graphics	· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·
1 x M.2 2280 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB*2TB NVMe SSD 1 x M.2 2242 PCIE Gen4x4, su	Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core 7)	2 x SO-DIMM, Up to DDR5-5	600, 48GB*2 (Core 3, Core 5, Core 7)
Wireless Network Intel® WirF1 BE202 + Bluetooth 5.4 (Core 3, Core 7) Intel® WirF1 BE202 + Bluetooth 5.4 (Core 3, Core 7) LAN Intel® Ethernet Controller I 226-V/LM, 2.56² Intel® Ethernet Controller I 226-V/LM, 2.56² Audio Up to 7.1 multichannel (or 8-channel) digital audio on HDMI and DP Type-C ports Up to 7.1 multichannel (or 8-channel) digital audio on HDMI and DP Type-C ports TPM FTPM FTPM Card Reader None None HDMI CEC Yes, 2 ports on back panel Yes, 2 ports on back panel Front I/O Ports 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x LSB 3.2 Gen2x Type-C 1 x USB 3.2 Gen2x Type-C 2 x LSB 3.2 Gen2 Type-A 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x HDMI 2.1	Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD	1 x M.2 2242 PCIe Gen4x4	1, supports 128GB~2TB NVMe SSD
LAN	Wireless Network	Intel® Wi-Fi 7 BE201 + Bluetooth 5.4 (Core Ultra)	Intel® Wi-Fi 7	BE201 + Bluetooth 5.4
AUDIO HDMI and DP Type-C ports TPM fTPM fTPM fTPM Card Reader None None HDMI CEC Yes, 2 ports on back panel Yes, 2 ports on back panel Front I/O Ports 1 x USB 3.2 Gen2 X Type-C 2 x USB 3.2 Gen2 Type-A 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1 x USB 3.2 Gen2 Type-A 1 x USB 3.2 G		· · · · · · · · · · · · · · · · · · ·		
Card Reader None None HDMI CEC Yes, 2 ports on back panel Yes, 2 ports on back panel Front I/O Ports 1 x USB 3.2 Gen2x Type-C 1 x USB 3.2 Gen2x Type-C 2 x USB 3.2 Gen2 Type-A 2 x USB 3.2 Gen2 Type-A 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) Back I/O Ports 1 x USB 3.2 Gen2 Type-A 1 x USB 3.2 Gen2 Type-A 1 x RJ45 LAN 1 x RJ45 LAN 1 x USB 2.0 Type-A 1 x RJ45 LAN 1 x Kensington Lock 1 x Kensington Lock Power Supply Power Adapter Meets DOE Level VI, efficiency >=88% Power Adapter Meets DOE Level VI, efficiency >=88% Power Supply 9 very Adapter Meets DOE Level VI, efficiency >=88% Power Adapter Meets DOE Level VI, efficiency >=88% Power Supply 0 to 40°C 0 to 40°C Storage Temp -40 to 60°C -40 to 60°C Humidity 0%-92% non-condensing³ 0%-92% non-condensing³ Produce Dimensions (W x D x H) 117 x 112 x 54mm 117 x 112 x 54mm Product Weights 364.3g 357.4g Color Box Dimensions (W x D x H) 151 x 183 x 127mm 151 x 183 x 127mm Packaged	Audio			
HDMI CEC Front I/O Ports 1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1 x USB 3.2 Gen2 Type-A 1 x U	TPM	fTPM		fTPM
Front I/O Ports 1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A 2 x USB 3.2 Gen2 Type-A 1 x USB 3.2 Gen2 Type-A 2 x USB 3.2 Gen2 Type-A Back I/O Ports 2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1 x USB 3.2 Gen2 Type-A 1 x USB 3.2 G	Card Reader	None		None
Front I/O Ports 2 x USB 3.2 Gen2 Type-A 2 x HDMI 2.1 TMDS Compatible (4k@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1 x USB 3.2 Gen2 Type-A 1 x USB 3.2 Gen2 Type-A 1 x USB 3.2 Type-A 1 x U	HDMI CEC	Yes, 2 ports on back panel	Yes, 2 po	rts on back panel
Back I/O Ports 1x USB 3.2 Gen2 Type-A 1x USB 2.0 Type-A 1x USB 2.0 Type A 1x USB 3.2 Gen2 Type-A 1x USB 5.2 Gen2 Type-A Type-A 1x USB 5.2 Gen2 Type-A 1x USB 5.2 Gen2 Type-A 1x US	Front I/O Ports	··		
Power Supply 19VDC, 6.32A, 120W Power Adapter Meets DOE Level VI, efficiency >= 88% 19VDC, 6.32A, 120W Power Adapter Operating Temp 0 to 40°C 0 to 40°C Storage Temp -40 to 60°C Humidity 0%-92% non-condensing³ 0%-92% non-condensing³ Produce Dimensions (W x D x H) Product Weights 364.3g 357.4g Color Box Dimensions (W x D x H) Packaged Weight 1385g 151 x 183 x 127mm Accessories AC Adapter+Power Cord⁴ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card Power Adapter Meets DOE Level VI, efficiency >= 88% 19VDC, 6.32A, 120W Power Adapter Power Adapter Meets DOE Level VI, efficiency >= 88% 19VDC, 6.32A, 120W Power Adapter 19VDC, 6.32A, 120W Power Adapter 9 19VDC, 6.32A, 120W Power Adapter 9 19VDC, 6.32A, 120W Power Adapter 9 19VDC, 6.32A, 120W Power Adapter 19VDC, 6.32A, 120W Power Adapter 9 10 40°C 9 40 to 40°C 9 40 to 60°C -40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C 9 40 to 60°C -40 to	Back I/O Ports	2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1x USB 3.2 Gen2 Type-A 1x USB 2.0 Type-A 1 x RJ45 LAN	2 x Thunderbolt TM 4 1x USB 1x U 1	ports (incl. DP 2.1 and USB4) 3.2 Gen2 Type-A SB 2.0 Type A x RJ45 LAN
Power Supply 19VDC, 6.32A, 120W Power Adapter Meets DOE Level VI, efficiency >= 88% 19VDC, 6.32A, 120W Power Adapter Operating Temp 0 to 40°C 0 to 40°C Storage Temp -40 to 60°C Humidity 0%-92% non-condensing³ 0%-92% non-condensing³ Produce Dimensions (W x D x H) Product Weights 364.3g 357.4g Color Box Dimensions (W x D x H) Packaged Weight 1385g 151 x 183 x 127mm Accessories AC Adapter+Power Cord⁴ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card Power Adapter Meets DOE Level VI, efficiency >= 88% 19VDC, 6.32A, 120W Power Adapter Power Adapter Meets DOE Level VI, efficiency >= 88% 19VDC, 6.32A, 120W Power Adapter 19VDC, 6.32A, 120W Power Adapter 9 19VDC, 6.32A, 120W Power Adapter 9 19VDC, 6.32A, 120W Power Adapter 9 19VDC, 6.32A, 120W Power Adapter 19VDC, 6.32A, 120W Power Adapter 9 10 40°C 9 40 to 40°C 9 40 to 60°C -40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C -40 to 60°C 9 40 to 60°C -40 to 60°C 9 40 to 60°C -40 to	Side I/O Ports	1 x Kensington Lock	1 x Ke	ensington Lock
Storage Temp -40 to 60°C Humidity 0%-92% non-condensing³ 0%-92% non-condensing³ Produce Dimensions (W x D x H) 117 x 112 x 54mm 117 x 112 x 54mm Product Weights 364.3g 357.4g Color Box Dimensions (W x D x H) 151 x 183 x 127mm 151 x 183 x 127mm Packaged Weight 1385g 1385g AC Adapter+Power Cord⁴ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card Warranty Card	Power Supply	Power Adapter Meets DOE Level VI, efficiency >=88%	Power Adapter Meets	DOE Level VI, efficiency >=88%
Storage Temp -40 to 60°C Humidity 0%-92% non-condensing³ 0%-92% non-condensing³ Produce Dimensions (W x D x H) 117 x 112 x 54mm 117 x 112 x 54mm Product Weights 364.3g 357.4g Color Box Dimensions (W x D x H) 151 x 183 x 127mm 151 x 183 x 127mm Packaged Weight 1385g 1385g AC Adapter+Power Cord⁴ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card Warranty Card	Operating Temp	0 to 40°C		0 to 40°C
Humidity 0%-92% non-condensing ³ 0%-92% non-condensing ³ Produce Dimensions (W x D x H) 117 x 112 x 54mm 117 x 112 x 54mm Product Weights 364.3g 357.4g Color Box Dimensions (W x D x H) 151 x 183 x 127mm 151 x 183 x 127mm Packaged Weight 1385g 1385g AC Adapter+Power Cord ⁴ VESA Bracket and Screws VESA Bracket and Screws Cable Clip Cable Clip Safety/Caution/Regulatory Insert Warranty Card				
(W x D x H) 117 x 112 x 54mm Product Weights 364.3g Color Box Dimensions (W x D x H) 151 x 183 x 127mm Packaged Weight 1385g AC Adapter+Power Cord ⁴ VESA Bracket and Screws VESA Bracket and Screws AC Adapter+Power Cord ⁴ VESA Bracket and Screws Accessories Cable Clip Safety/Caution/Regulatory Insert Warranty Card Safety/Caution/Regulatory Insert Warranty Card	,			
Color Box Dimensions (W x D x H) Packaged Weight AC Adapter+Power Cord ⁴ VESA Bracket and Screws Accessories AC Cable Clip Safety/Caution/Regulatory Insert Warranty Card Warranty Card 151 x 183 x 127mm 151 x 183 x 127mm 151 x 183 x 127mm AC Adapter+Power Cord ⁴ AC Adapter+Power Cord ⁴ VESA Bracket and Screws Cable Clip Cable Clip Safety/Caution/Regulatory Insert Warranty Card		117 x 112 x 54mm	117	x 112 x 54mm
(W x D x H) Packaged Weight 151 x 183 x 12/mm 151 x 183 x 12/mm 1385g 1385g AC Adapter+Power Cord ⁴ VESA Bracket and Screws Accessories Cable Clip Safety/Caution/Regulatory Insert Warranty Card Warranty Card	-	364.3g		357.4g
AC Adapter+Power Cord ⁴ VESA Bracket and Screws Accessories Cable Clip Safety/Caution/Regulatory Insert Warranty Card AC Adapter+Power Cord ⁴ VESA Bracket and Screws VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card Warranty Card		151 x 183 x 127mm	151 x	183 x 127mm
VESA Bracket and Screws Accessories Cable Clip Safety/Caution/Regulatory Insert Warranty Card VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card Warranty Card	Packaged Weight	1385g		1385g
Distal® Ara™ CDU requires using 2 v.CO DIMM	Accessories	VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert	VESA Bra (Safety/Cauti	acket and Screws Cable Clip on/Regulatory Insert
	Intel® Anall CDU requires value of the CO DIAMA			

⁽¹⁾ Intel® Arc™ GPU requires using 2 x SO-DIMM

⁽²⁾ Intel® Ethernet Controller I226-LM included on vPro enabled systems

⁽³⁾ Humidity Info detail please check link: Non-condensing humidity as defined by temperature vs dew point (4) Power cord included is region specific, and some SKUs do not include the power cord









Image C

Image D

it Specifications		mage 6
-		
Marketing Name	ASUS NUC 15 PRO Kit (Tall)	ASUS NUC 15 PRO Kit (Slim)
Photo	Image C	Image D
ASUS Logo	No	No
ASUS NUC Logo	No	No
Color	Black	Black
OS Support	Supports Windows 11 Home 64-bit Windows 11 Pro 64-bit Windows 11 IoT Enterprise 64-bit Windows 11 Pro Education Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment	Supports Windows 11 Home 64-bit Windows 11 Pro 64-bit Windows 11 IoT Enterprise 64-bit Windows 11 Pro Education Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment
СРИ	Intel® Core TM Ultra 7 265H (vPro) Intel® Core TM Ultra 5 235H (vPro) Intel® Core TM Ultra 7 255H Intel® Core TM Ultra 5 225H Intel® Core TM 7 240H Intel® Core TM 5 210H Intel® Core TM 3 100U	Intel® Core TM Ultra 7 265H (vPro) Intel® Core TM Ultra 5 235H (vPro) Intel® Core TM Ultra 7 255H Intel® Core TM Ultra 5 225H Intel® Core TM 7 240H Intel® Core TM 5 210H Intel® Core TM 3 100U
Chipset	Integrated	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics (Core 3, 5, 7)	Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics (Core 3, 5, 7)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core 7) 2 x CSO-DIMM, Up to DDR5-6400, 48GB*2 (Core Ultra) No memory installed at shipment	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 (Core 3, Core 5, Core 7 2 x CSO-DIMM, Up to DDR5-6400, 48GB*2 (Core Ultra) No memory installed at shipment
Storage	1 x M.2 2280 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD No storage installed at shipment PCIe Gen 5 ready design	1 x M.2 2280 PCIe Gen4x4, supports 128GB~2TB NVMe SSD 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD No storage installed at shipment PCIe Gen 5 ready design
Wireless Network	Intel® Wi-Fi 7 BE201 (Gig+), Bluetooth 5.4 (Core Ultra) Intel® Wi-Fi 7 BE202 (Gig+), Bluetooth 5.4 (Core 3, Core 5, Core 7)	Intel® Wi-Fi 7 BE201 (Gig+), Bluetooth 5.4 (Core Ultra) Intel® Wi-Fi 7 BE202 (Gig+), Bluetooth 5.4 (Core 3, Core 5, Core
LAN	Intel® Ethernet Controller I226-V/LM, 2.5G ²	Intel® Ethernet Controller I226-V/LM, 2.5G ²
Audio	Up to 7.1 multichannel (or 8-channel) digital audio on HDMI and DP Type-C ports	Up to 7.1 multichannel (or 8-channel) digital audio on HDMI and DP Type-C ports
TPM	fTPM	fTPM
		None
Card Reader	None	
HDMI CEC	Yes, 2 ports on back panel	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1x USB 3.2 Gen2 Type-A 1x USB 2.0 Type A 1 x RJ45 LAN 1 x DC-in	2 x HDMI 2.1 TMDS Compatible (4K@60Hz) 2 x Thunderbolt™ 4 ports (incl. DP 2.1 and USB4) 1x USB 3.2 Gen2 Type-A 1x USB 2.0 Type A 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	1 x Kensington Lock	1 x Kensington Lock
Power Supply	Power Adapter Meets DOE Level VI, efficiency >=88% 19VDC, 6.32A, 120W Power Adapter	Power Adapter Meets DOE Level VI, efficiency >=88% 19VDC, 6.32A, 120W Power Adapter
Operating Temp	0 to 40°C	0 to 40°C
Storage Temp	-40 to 60°C	-40 to 60°C
Storage Temp Humidity	0%-92% non-condensing ³	-40 to 60 C 0%-92% non-condensing ³
Product Dimensions (W x D x H)	117 x 112 x 54mm	117 x 112 x 37mm
Product Weights	364.3g	357.4g
olor Box Dimensions (W x D x H)	151 x 183 x 127mm	151 x 183 x 127mm
Packaged Weight	1385g	1385g
ntel® Arc™ GPU require Accessories ntel® Ethernet Controll Iumidity Info detail plea	AC Adapter+Power Cord ⁴ es using 2 x SO-DIMM Cable Clip er I226-LM included can be seen as a cable Clip as check link: Non-completing and umidity defined by dew pregion specific, and some SKUs do not include the power	AC Adapter+Power Cord ⁴ VESA Bracket and Screws Cable Clip Safety/Caution/Regulatory Insert Warranty Card







Board Specifications

Image E

Board Specifications	
Marketing Name	ASUS NUC 15 Pro Board
Photo	Image E
ASUS Logo	N/A
ASUS NUC Logo	N/A
Color	N/A
OS Support	Supports Windows 11 Home 64-bit Windows 11 Pro 64-bit Windows 11 IoT Enterprise 64-bit Windows 11 Pro Education Ubuntu 24.04 LTS 64-bit RedHat Enterprise Linux 64-bit *No OS installed at shipment
CPU	Intel® Core™ Ultra 7 265H, cTDP 40W Intel® Core™ Ultra 7 255H, cTDP 40W Intel® Core™ Ultra 5 235H, cTDP 40W Intel® Core™ Ultra 5 225H, cTDP 40W Intel® Core™ Ultra 5 225H, cTDP 40W Intel® Core™ 7 Processor 240H, cTDP 25W Intel® Core™ 5 Processor 210H, cTDP 25W Intel® Core™ 3 Processor 100U, cTDP 25W
Chipset	Integrated
Graphics	Intel® Arc™ GPU (Core Ultra)¹ Intel® Graphics Technology (Core 3, Core 5, Core7)
Memory	2 x SO-DIMM, Up to DDR5-5600, 48GB*2 OR 2 x CSO-DIMM, Up to DDR5-6400, 48GB*2
Storage	1 x M.2 2280 PCIe Gen5x4, supports 128GB~8TB NVMe SSD 2 1 x M.2 2242 PCIe Gen4x4, supports 128GB~2TB NVMe SSD
Wireless Network	None
AN	Intel® Ethernet Controller I226-V/LM, 2.5G ³
Audio	N/A
PM	fTPM
Card Reader	None
HDMI CEC	Yes, 2 ports on back panel
Front I/O Ports	1 x USB 3.2 Gen2x2 Type-C 2 x USB 3.2 Gen2 Type-A
Back I/O Ports	2 x Thunderbolt 4 Type-C w/ DisplayPort 2.1 1 x USB 3.2 Gen 2 Type-A 1 x USB 2.0 Type-A 2 x HDMI 2.1 (TMDS Compatible) 1 x RJ45 LAN 1 x DC-in
Side I/O Ports	N/A
ower Supply	Not Included
imensions (W x D x H)	101.6mm x 107.5mm x 29.5mm
Veights	226g
Dperating Temperature	0°C - 40°C
torage Temperature	-40°C to 60°C
lumidity	0%-92% non-condensing ⁴
(1) Intel® Arc™ GPU requires using 2 x SO-DIMM (2) Intel® Ethernet Controller I226-LM included on vPro e (3) Humidity Info detail please check link: Non-condensir	ng Humidity defined by dew point

Specifications, content, and product availability are all subject to change without notice and may differ from country to country. Actual performance may vary depending on the application, usage, environment, and other factors. Full specifications are available at http://www.asus.com

(4) Power cord included is region specific, and some SKUs do not include the power cord





Accessory Specifications

Marketing Name	ASUS NUC 15 Pro Accessory	ASUS NUC 15 Pro Accessory	ASUS NUC 15 Pro Accessory
Project Code	NUCIOALA0CR	NUCIOALASCR	NUCIOAESOCR

Photo







ASUS Logo	No	No	No
ASUS NUC Logo	No	No	No
Color	N/A	N/A	N/A
Storage	N/A	N/A	1 x M.2 2242 PCle Gen4x4, supports 128GB~2TB NVMe SSD
LAN	Intel® Ethernet Controller I226-V, 2.5G In	tel® Ethernet Controller I226-V, 2.5G	N/A
Back I/O Ports	1 x RJ45 LAN	1 x RJ45 LAN 1 x RS232 DB9	N/A
Product Dimensions (W x D x H)	43mm x 88mm x 20mm	56mm x 88mm x 20mm	22mm x 58mm x 10mm
Product Weight	20.5g	30.3g	16.6g
Box Dimensions (W x D x H)	105mm x 110mm x 30mm	105mm x 110mm x 30mm	105mm x 110mm x 30mm
Packaged Weight	54.3g	64.1g	50.4g
Operating Temperature	0°C - 35°C	0°C - 35°C	0°C - 35°C
Storage Temperature	-40°C to 60°C	-40°C to 60°C	-40°C to 60°C
Humidity	0%-92% non-condensing ¹	0%-92% non-condensing ¹	0%-92% non-condensing ¹
Accessories	Safety/Caution/Regulatory Insert Warranty Card	Safety/Caution/Regulatory Insert Warranty Card	Safety/Caution/Regulatory Insert Warranty Card

⁽¹⁾ Non-condensing Humidity defined by dew point





Tall



Kensington Lock

4 5 6 7 8 9 10 6 7

- 1. **2**x USB 3.2 Gen2 Type-A
- 2. USB 3.2 Type-C Gen 2x2
- 3. Power button

- 4. Security mechanism for power cable
- 5. DC-in
- 6. 2x HDMI 2.1 (TMDS)
- 7. 2x Thunderbolt™4
- 8. 2.5Gb Ethernet Port
- * All USB ports with individual USB power control

9. USB 2.0 Type-A 10. USB 3.2 Gen2 Type-A

Slim



Kensington Lock


- 1. 2x USB 3.2 Gen2 Type-A
- 2. USB 3.2 Gen 2x2 Type-C
- 3. Power button

- 4. Security mechanism for power cable
- 5. DC-in
- 9. USB 2.0 Type-A 10. USB 3.2 Gen2 Type-A
- 6. 2x HDMI 2.1 (TMDS)
- 7. 2x Thunderbolt™ 4
- 8. 2.5Gb Ethernet Port





What's in the box

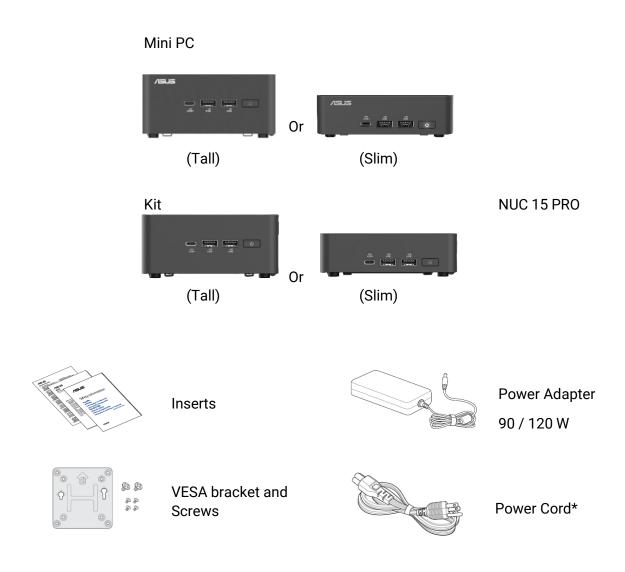

NOTE:

- The most up-to-date and accurate product specifications are available on www.asus.com for download.
- Product and accessory images are for illustrative purposes only. The actual appearance and specifications may vary depending on the model.
- *The bundled power adapter may vary depending on the model and the country (or region) of sale.
- Some bundled accessories may vary depending on the model. For details on these accessories, refer to their respective user manuals.
- If the device or its components fail or malfunction during normal and proper use within the warranty period, bring the warranty card to the ASUS Service Center for replacement of the defective components.